



PRODUKTBESCHREIBUNG

- » Speziell zum Bearbeiten von kleinen bis kleinsten Flächen, Stegen und komplizierten Formkonturen
- » Für gehärtete und ungehärtete Werkzeugstähle
- » Ideal zum Entfernen von harten Erodierschichten
- » Hohe Bruchfestigkeit

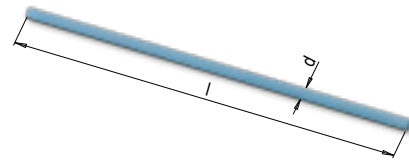

Farbe	d	l	Korn	 Stk. / VPE	Nr.	EUR	 Stk. / VPE	Nr.	EUR
●	3	50	120	1	V 74622/ 3,0/ 50/ 120	< >	10	V 74622/ 3,0/ 50/ 120/Set-10	< >
●	3	50	180	1	V 74622/ 3,0/ 50/ 180	< >	10	V 74622/ 3,0/ 50/ 180/Set-10	< >
●	3	50	300	1	V 74622/ 3,0/ 50/ 300	< >	10	V 74622/ 3,0/ 50/ 300/Set-10	< >
●	3	50	400	1	V 74622/ 3,0/ 50/ 400	< >	10	V 74622/ 3,0/ 50/ 400/Set-10	< >
●	3	50	600	1	V 74622/ 3,0/ 50/ 600	< >	10	V 74622/ 3,0/ 50/ 600/Set-10	< >
●	3	50	800	1	V 74622/ 3,0/ 50/ 800	< >	10	V 74622/ 3,0/ 50/ 800/Set-10	< >
○	3	50	1000	1	V 74622/ 3,0/ 50/1000	< >	10	V 74622/ 3,0/ 50/1000/Set-10	< >
●	3	50	1200	1	V 74622/ 3,0/ 50/1200	< >	10	V 74622/ 3,0/ 50/1200/Set-10	< >
●	3	100	120	1	V 74622/ 3,0/100/ 120	< >	10	V 74622/ 3,0/100/ 120/Set-10	< >
●	3	100	180	1	V 74622/ 3,0/100/ 180	< >	10	V 74622/ 3,0/100/ 180/Set-10	< >
●	3	100	300	1	V 74622/ 3,0/100/ 300	< >	10	V 74622/ 3,0/100/ 300/Set-10	< >
●	3	100	400	1	V 74622/ 3,0/100/ 400	< >	10	V 74622/ 3,0/100/ 400/Set-10	< >
●	3	100	600	1	V 74622/ 3,0/100/ 600	< >	10	V 74622/ 3,0/100/ 600/Set-10	< >
●	3	100	800	1	V 74622/ 3,0/100/ 800	< >	10	V 74622/ 3,0/100/ 800/Set-10	< >
○	3	100	1000	1	V 74622/ 3,0/100/1000	< >	10	V 74622/ 3,0/100/1000/Set-10	< >
●	3	100	1200	1	V 74622/ 3,0/100/1200	< >	10	V 74622/ 3,0/100/1200/Set-10	< >