




PRODUCT DESCRIPTION

- » With quick start push function
- » Key lock prevents unwanted zeroing
- » Rapid switching from mm to inches and vice versa, in any position

INCLUDED IN THE DELIVERY

- » Certificate of calibration, a battery (CR2032) and a plastic case

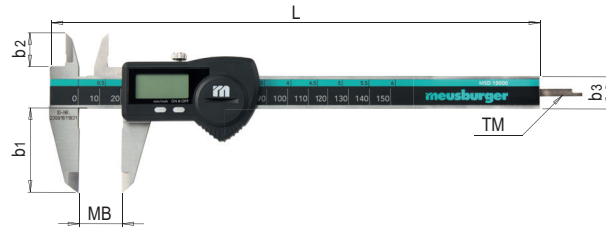

| L | b1 | b2 | b3 | Tol. | Wt. | MB ¹⁾ | TM ²⁾ | No. | #CU# |
|-----|----|----|----|---------|-------|------------------|------------------|-----------------|-------|
| 235 | 40 | 16 | 16 | +/-0,03 | 143 g | 0-150 | flat | MSD 10000/150/F | XX,YY |
| 235 | 40 | 16 | 16 | +/-0,03 | 145 g | 0-150 | Ø 1.5 mm | MSD 10000/150/R | XX,YY |

1) MB: measuring range

2) TM: depth bar

Pre-calibrated